


ITC Power

Portable Diesel Generators

Silent Canopy, Electric Start

DG14000SE / DG14000SE-3 DG14000SE-T

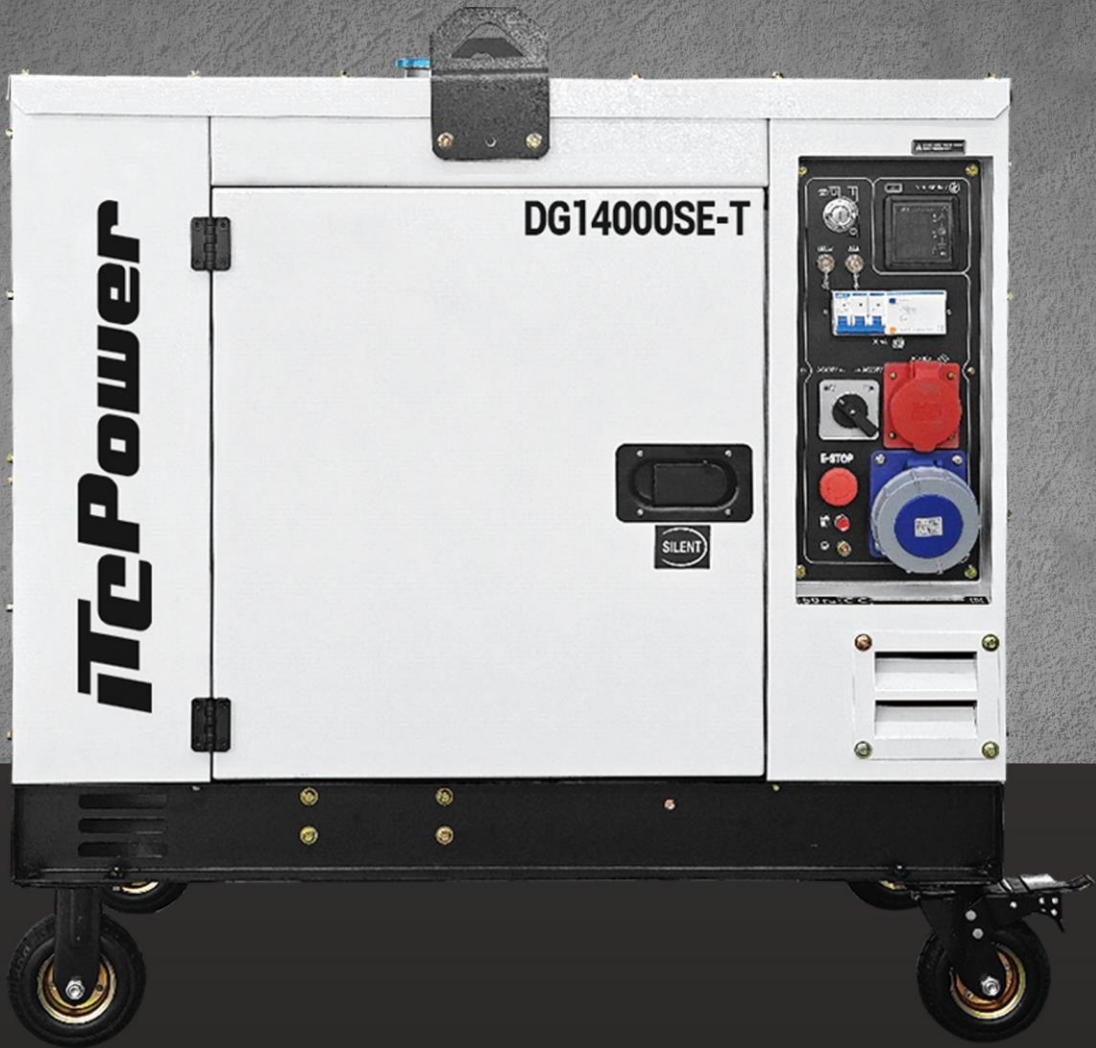

GENERATOR		DG14000SE	DG14000SE-3	DG14000SE-T
Frequency	Hz	50	50	50
Rated Power		10 kW	12.5 kVA	9 kW / 12.5 kVA
Max. Power		11 kW	13.8 kVA	10 kW / 13.8 kVA
Voltage	V	230	230 / 400	230 / 400
Current	A	47.8	19.9	43.5/19.9
Plugs		16A & 63A	32A & 16A	63A & 32A
Display		LED6	LED6	LED6
Fuel tank capacity	L	27	27	27
Running time @75% load	H	8	8	8
Sound level @ 7m	dBA	72	72	72
DC output	V/A	12 / 8.3	12 / 8.3	12 / 8.3
Battery	V/Ah	12/45	12/45	12/45
ENGINE		DV920E	DV920E	DV920E
Engine type		Diesel	Diesel	Diesel
Power	hp	18	18	18
Start		Electric	Electric	Electric
Displacement	CC	912	912	912
Oil Capacity	L	2.8	2.8	2.8
ALTERNATOR		AL12	AL12-3	AL12-T
Power	Kw	12	12	12
Power Factor		1	0.8	1 / 0.8
Voltage Regulation		Brush / AVR	Brush / AVR	Brush / AVR
DIMENSIONS & WEIGHT				
Net Weight	Kg	290	290	290
Gross Weight	Kg	310	310	310
Machine size	mm	1020x660x850	1020x660x850	1020x660x850
Case packing	mm	1080x720x1100	1080x720x1100	1080x720x1100

DG — Diesel Generator

SE — Silent Canopy, Electric Start, 1 Phase

SE-3 — Silent Canopy, Electric Start, 3 Phase

SE-T — Silent Canopy, Electric Start, Full Power 1 Phase & 3 Phase

Options

Control panel



LED6
Voltage AC
Power output
Frequency
Battery voltage
Current
Working time



DC30 (ATS)
Smart controller



ATS/AUTO
module

Engine



NSK
bearing



Euro5
catalyst



Preheater

Alternator



THD ≤ 5%

Package



Individual pallet packing

Accessories

ATS box



Remote Controller 300M



Wheels With Brakes

